
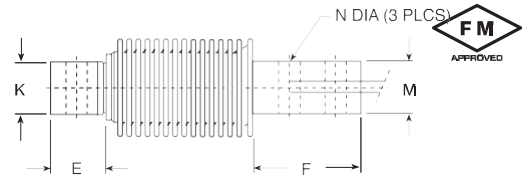


RLHBB Single-Ended Beam, Stainless Steel

Hermetically-sealed, IP68, NTEP 1:5000 Class III Multiple Cell, OIML C3

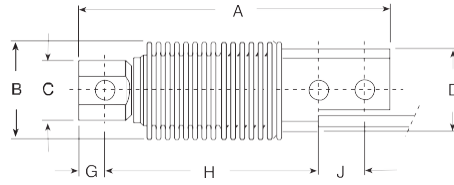

Picture is a representation of actual product

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	J	K	M	N	
kg/mm 5-500	120.0	40.0	23.0	32.0	20.5	45.5	10.0	82.0	18.0	20.0	20.0	8.20	
lb/inches 11.0-1102.3	4.72	1.61	.91	1.26	.81	1.79	.39	3.23	.71	.79	.79	.32	

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Deflection at Capacity:	5-250 kg ≤ .4 mm/.015"
Bridge Resistance:	350 ohms, nominal	Seal Type:	Hermetically-sealed, IP68
Material/Finish:	Stainless steel	Cable Length:	3 m/10'
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C	Cable Color Code:	Blue.....+ Excitation Black.....- Excitation White.....+ Signal Red.....- Signal Green.....+ Sense Gray.....- Sense
Safe Overload:	150% Full scale	Warranty:	2-year limited warranty
Rated Excitation:	10VDC (15V maximum)		
Total Error:	0.02% Full scale		
Insulation Resistance:	1000 megohms		

RLHBB ORDER INFORMATION

Load Rating	Part #
OIML	
5 kg (11.0 lb).....	32678.....
10 kg (22.0 lb).....	32677.....
20 kg (44.1 lb).....	31259.....
50 kg (110.2 lb).....	31260.....
100 kg (220.5 lb).....	31261.....
200 kg (441.0 lb).....	31262.....
250 kg (551.2 lb).....	31263.....
500 kg (1102.5 lb).....	36462.....
NTEP	
5 kg (11.0 lb).....	41113.....
10 kg (22.0 lb).....	41114.....
20 kg (44.1 lb).....	41115.....
50 kg (110.2 lb).....	41116.....
100 kg (220.5 lb).....	41117.....
200 kg (441.0 lb).....	41118.....
250 kg (551.2 lb).....	41119.....
500 kg (1102.5 lb).....	41120.....

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
HBM	
Revere Transducers.....	
Vishay Tedea-Huntleigh	
Vishay Celtron	

WEIGH MODULE AVAILABLE

Model
1700HE Series

* Non-NTEP
** Non-NTEP, not FM-approved